



MVF40

VENT-FREE MULTI-SIDED FIREPLACE



The Ultimate in Design, Engineering & Quality

The unit illustrated is an MVF40 Vent Free Multi-Sided Fireplace, GLMVF40MVP Burner System - Liquid Propane, LOGC31 Split Oak Log Set, MVF40PK Peninsula Kit, and MVF40PPK Black Panel Kit.

The Ultimate in Vent-Free Multi-Sided Fireplaces for New Home Construction or Renovation

YOUR BEST CHOICE FOR INSTALLATION ANYWHERE THROUGHOUT YOUR HOME.

FOR MVF40 FIREBOX

BURNER MODEL	TYPE	FUEL TYPE	BTU INPUT	LOG SET
Left Hand Burner MVFB4040MVN MVFB4040MVP	MILLIVOLT MILLIVOLT	NATURAL PROPANE	26,000-38,000 26,000-34,000	LOGF38 LOGF38
Right Hand Burner MVFB4040MVN MVFB4040MVP	MILLIVOLT MILLIVOLT	NATURAL PROPANE	26,000-38,000 26,000-34,000	LOGF38 LOGF38
Universal Burner GLMVF40MVN GLMVF40MVP	MILLIVOLT MILLIVOLT	NATURAL PROPANE	25,900-38,200 24,200-30,500	LOGC31 LOGC31

FEATURES*

- Matchless Pieso Ignition
- ODS Safety Pilot
- Millivolt Control with Variable Flame and BTU Control
- Wall Switch Control
- Decorative Rock

OPTIONAL FEATURES

Refractory Liners – End Panel, Side Panel

Grills – Black, Classic Series Antique Brass, Polish Brass, Chrome

Surround (for See-through only) – Antique, Polish Brass, Chrome

Fan Kit

Remote Control – On/Off, Thermostat or Hi/Lo On/Off

Thermostat – Wall Mount Millivolt Thermostat or Programmable Thermostat



MVF40 Fireplace, MVFB4040MVP
Left Burner System, LOGF38 Fibre Split
Oak Log Set, MVF40PK Peninsula Kit,
MVF40PPK Panel Kit Black



MVF40 Fireplace, MVFB4040MVP
Left Burner System, LOGF38 Fibre
Split Oak Log Set, MVF40CK Corner Kit,
MGCKBP Grill - Classic Polish Brass



MVF40 Fireplace, MVFB4040MVP
Left Burner System, LOGF38 Fibre Split
Oak Log Set, MVF40SK See-Through Kit,
MGCKBP Grill - Classic Polish Brass

UNIT AND FRAMING SPECIFICATIONS


MODEL	Height Framing	Depth Framing	Width Framing
PENINSULA	33 ¹ / ₄ "	20 ⁵ / ₈ "	38 ¹ / ₈ " [1]
SEE-THRU	33 ¹ / ₄ "	20 ⁵ / ₈ "	41 ¹ / ₈ " [2]
BAY PENINSULA	33 ¹ / ₄ "	23 ¹¹ / ₁₆ "	35 ¹ / ₁₆ " [3]
CORNER	33 ¹ / ₄ "	23 ³ / ₄ "	38 ¹ / ₈ " [4]
ISLAND	See Manual		

[1] Using Nailing Tabs with 1/2" Facing, Otherwise 37⁹/₁₆"

[2] Using Nailing Tabs, Otherwise 40¹/₁₆"

[3] Using Nailing Tabs with 1/2" Facing, Otherwise 13¹/₈"

[4] Using Nailing Tabs with 1/2" Facing, Otherwise 37⁹/₁₆"

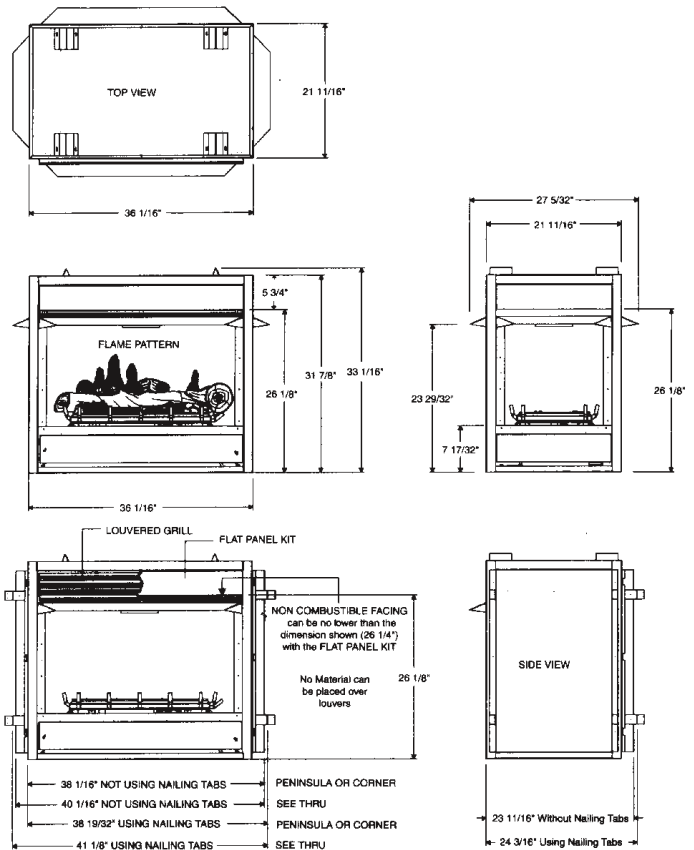

Kingsman Industries maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.

Certification:

The model MVF40 is certified for USA to IAS2-97. The burners MVFB4040MVN, MVFB4040MVP, MVFB4040MVN, MVFB4040MVP are certified for USA to ANSI Z21.11.2b - 2004, ANSI Z21.11.2 - 2002, ANSI Z21.11.2a - 2003. The burners GLMVF40MVN, GLMVF40MVP are certified for USA to ANSI Z21.11.2 - 2004, ANSI Z21.60/CGA 2.26 - M2003.

*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.



2340 Logan Avenue
Winnipeg, Manitoba, Canada R2R 2V3
Phone: (204) 632-1962 Fax: (204) 632-1960
www.kingsmanfireplaces.com